




EM82.2 Client

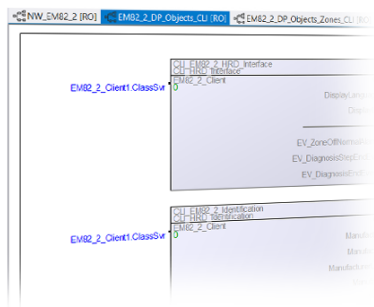

The EM82.2 Client Library offers the option of connecting to hot runner devices using Euromap 82.2 communication. The SIGMATEK system works as an OPC UA client.

The Euromap 82.2 standard describes a uniform interface between injection molding machines and hot runner devices (HRD = Hot Runner Device) and offers options for reading out status information, setting setpoints, transmitting alarms and much more.

FEATURES

- OPC UA-based interface for hot runner devices (HRD)
- Alarm transmission
- Prefabricated data point objects for data storage
- Secure communication via SSL encryption

FACTS

Development environment	LASAL CLASS 2
Article number	02-010-080-2
Performance index	A B C D E